




แข็งแรง ทนทาน ผลิตได้คุณภาพ
TOUGH , DURABLE AND WELL BUILT

A SERIES DOUBLE-STRAND ROLLER CHAIN

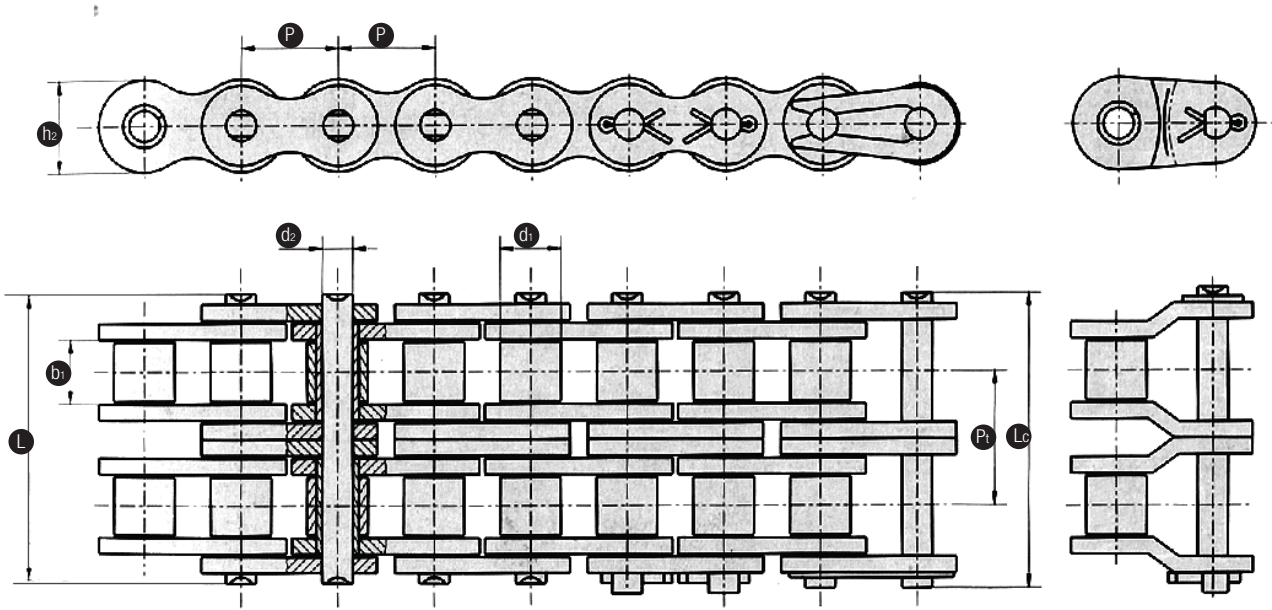


DIN/ISO	ANSI	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
DIN/ISO	ANSI	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	Pt	Q min	Qo	q
Chain No.	Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	kg/m
04C-2	*25-2	6.35	3.3	3.1	2.31	14.5	15.1	5.9	6.4	7	8.6	0.28
06C-2	*35-2	9.525	5.08	4.77	3.58	22.5	23.4	8.7	10.13	15.8	19.7	0.68
08A-2	40-2	12.70	7.92	7.85	3.96	31	32.2	12	14.38	28.2	35.9	1.24
10A-2	50-2	15.875	10.16	9.4	5.08	39	40.3	15	18.11	44.4	58.1	2.14
12A-2	60-2	19.05	11.91	12.57	5.94	48.8	50.3	18	22.78	63.6	82.1	3.15
16A-2	80-2	25.40	15.88	15.75	7.92	61.9	64.2	24	29.29	113.4	141.8	5.32
20A-2	100-2	31.75	19.05	18.9	9.53	75.8	79.1	30.1	35.76	177	219.4	8
24A-2	120-2	38.10	22.23	25.22	11.1	95.7	98.8	36.1	45.44	254	314.9	11.75
28A-2	140-2	44.45	25.4	25.22	12.7	103.1	107.4	42.1	48.87	344.8	427.5	15.58
32A-2	160-2	50.80	28.58	31.55	14.27	122.9	127.2	48.1	58.55	453.6	562.4	20.6
36A-2	180-2	57.15	35.71	35.48	17.46	138.6	144.4	53.6	65.84	560.5	695	26.9
40A-2	200-2	63.50	39.68	37.85	19.84	151	157	60	71.55	707.6	877.4	33.4
48A-2	240-2	76.20	47.63	47.4	23.81	183.4	190.3	71.8	87.83	1020.6	1255.3	48.5

1.*Bushing chain: d1 in the table indicate the external diameter of the bushing.

2.*"Lc" indicates length of cotter pin for item above 16A, spring clip pin for item below 16A.

3.Copper-plated, zinc-plated, nickel-plated and chrome-plated chain, stainless steel chain and multiple strands chain available.

A SERIES SINGLE-STRAND ROLLER CHAIN

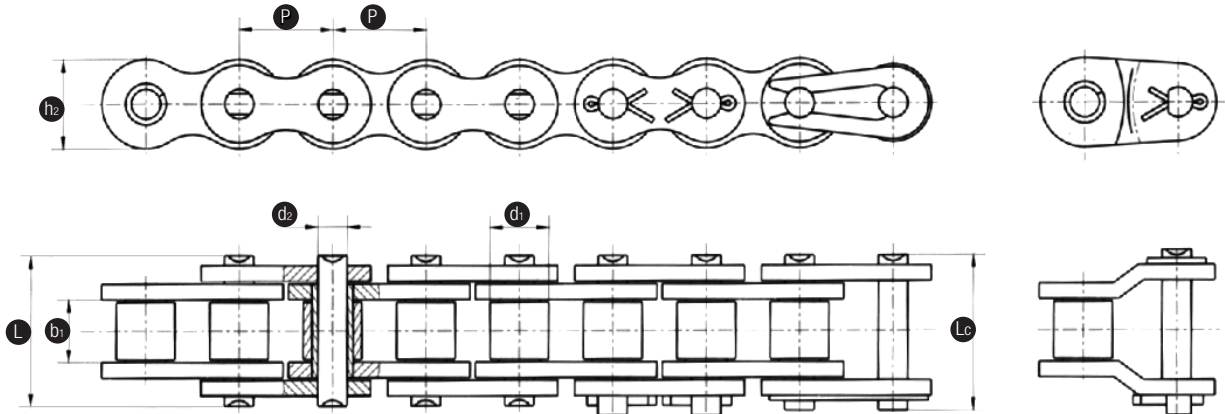

DIN/ISO	ANSI	Pitch	Roller diameter	Width between Inner plates	Pin diameter	Pin Length		Inner plate depth	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
DIN/ISO Chain No.	ANSI Chain No.	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	Pt	Q min	Qo	q
		mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	kg/m
	*10	3.175	1.7	1.6	1.16	4.45	/	2.9	/	1.2	1.30	0.039
	*15	4.7625	2.48	2.4	1.62	6.25	/	4.3	/	1.8	2.00	0.089
04C-1	*25	6.35	3.3	3.10	2.31	7.8	8.9	5.9	/	3.5	4.60	0.15
06C-1	*35	9.525	5.08	4.77	3.58	12.15	13.1	8.7	/	7.9	10.80	0.34
085-1	41	12.70	7.77	6.25	3.58	13.75	15	9.91	/	6.8	12.60	0.45
08A-1	40	12.70	7.92	7.85	3.96	16.6	17.75	12	/	14.1	17.50	0.66
10A-1	50	15.875	10.16	9.4	5.08	20.6	22	15	/	22.2	29.40	1.08
12A-1	60	19.05	11.91	12.57	5.94	25.9	27.5	18	/	31.8	41.50	1.59
16A-1	80	25.40	15.88	15.75	7.92	32.8	34.9	24	/	56.7	69.40	2.73
20A-1	100	31.75	19.05	18.9	9.53	40	43.4	30.1	/	88.5	109.20	3.99
24A-1	120	38.10	22.23	25.22	11.1	50.45	53.5	36.1	/	127.0	156.30	5.62
28A-1	140	44.45	25.4	25.22	12.7	54.4	58.7	42.1	/	172.4	212.00	7.95
32A-1	160	50.80	28.58	31.55	14.27	64.5	68.7	48.1	/	226.8	278.90	10.1
36A-1	180	57.15	35.71	35.48	17.46	72.8	78.6	53.6	/	280.2	341.80	13.59
40A-1	200	63.50	39.68	37.85	19.84	79.5	85.5	60	/	353.8	431.60	16.86
48A-1	240	76.2	47.63	47.4	23.81	95.5	102.5	71.8	/	510.3	622.50	24.4

1.*Bushing chain: d1 in the table indicate the external diameter of the bushing.

2."Lc" indicates length of cotter pin for item above 16A, spring clip pin for item below 16A.

3.Copper-plated, zinc-plated, nickle-plated and chrome-plated chain, stainless steel chain and multiple strands chain available.

ผู้จัดจำหน่าย